



- 25-Year Warranty* • Low Maintenance • Sustainable Source*
- Termite-resistant • Mould-resistant • Stable & Precise*
- Extremely Durable • Non-Tannins Leaching • Scratch-resistant*
- R11 Slip Rated • BAL29 Rated*

End Matched for Easy Installation

SIMDECK BAMBOO COGNAC
CTECH



SIMDECK BAMBOO ESPRESSO
XTR



www.simmonslumber.com.au




SIMDECK Bamboo has been used worldwide in many commercial and residential projects.

SIMDECK Bamboo is a natural alternate decking option. Compared to traditional Hardwood decking which can take up to 50 years before harvesting, **SIMDECK Bamboo** is sourced from sustainable Bamboo Forests which are harvested after only 4-6 years, making **SIMDECK Bamboo** an excellent storage of CO₂. Unlike Composite Decking which contain a mixture of both new and recycled plastics, **SIMDECK Bamboo** is primarily sourced from natural materials, providing a truly natural alternative.


SIMDECK Bamboo is an excellent natural alternative because of many of its inherent characteristics including; low maintenance, 25 year warranty* and BAL 29 rated. Due to its Fused Manufacturing process, it is also stable, scratch resistant and highly resistant to mould and bacteria.

SIMDECK Bamboo comes in 2 Colours, Cognac and Espresso. It is easy to lay due to its convenient concealed clip system or can be face-fixed if preferred.

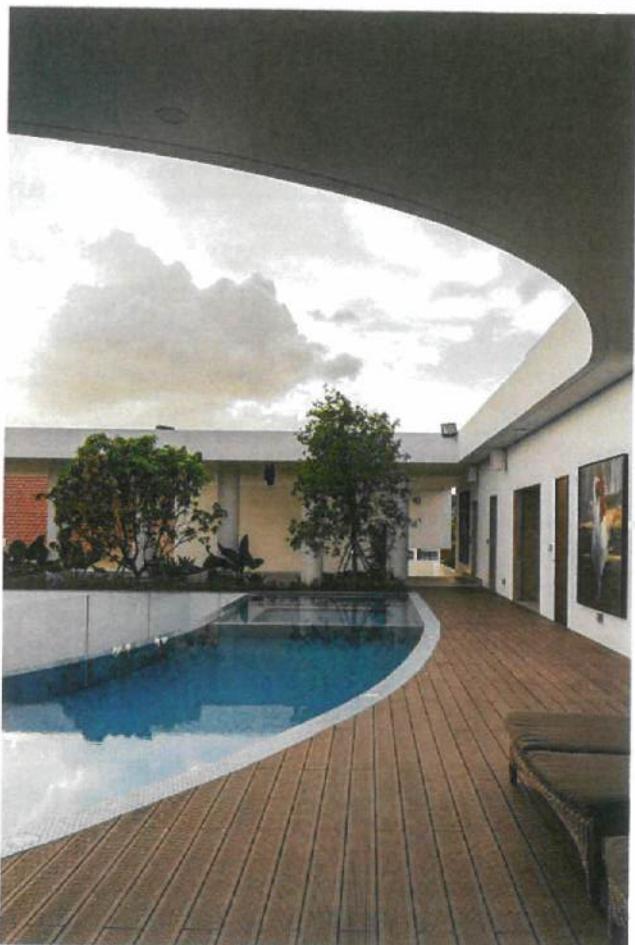

Size and Lengths	137 x 20 x 1850 137 x 20 x 3050
Durability	Class 1
Modulus of Elasticity	16.7 GPa
Hardness (Janka)	17.7 kN
Fire Rating	BAL 29:AS 1530.8.1
Termite Resistance	Class 1:AS 5604

Size and Lengths	137 x 20 x 1850
Durability	Class 1
Modulus of Elasticity	19.1 GPa
Hardness (Janka)	17.0 kN
Fire Rating	BAL 29:AS 1530.8.1
Termite Resistance	Class 1:AS 5604

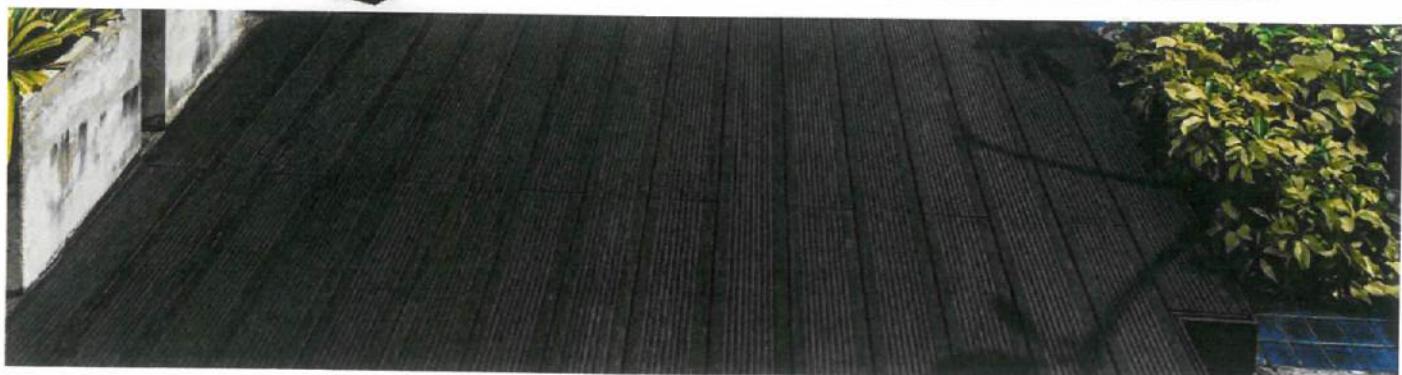




Simmonds Lumber
Timber importers & wholesalers



Please note the G1 and G2 profiles on the right when ordering. G2 profile is grooved on both sides while G1 profile is grooved only one side (starting board)



Retail Partner:

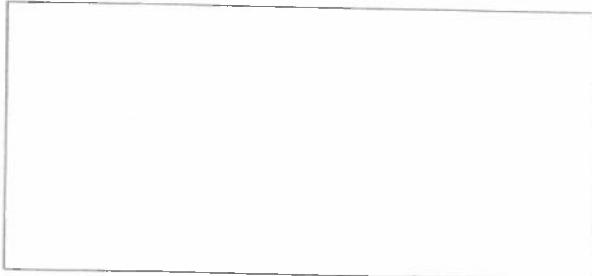


Please visit our retail partner or visit www.simmonslumber.com.au decking-bamboo/ for the complete list of retail partners stocking SIMDECK BAMBOO

BRISBANE
+61 7 3267 0244
sales_qld@simmonsgroup.com.au
146 - 164 Buchanan Road
Banyo QLD 4014

MELBOURNE
+61 3 9791 2241
sales_vic@simmonsgroup.com.au
22 - 32 Nathan Road
Dandenong VIC 3175

SYDNEY
+61 2 9638 7333
salesnsw@simmonsgroup.com.au
1 Durham Street
Rosehill NSW 2142


INSTALLATION




A



B



C

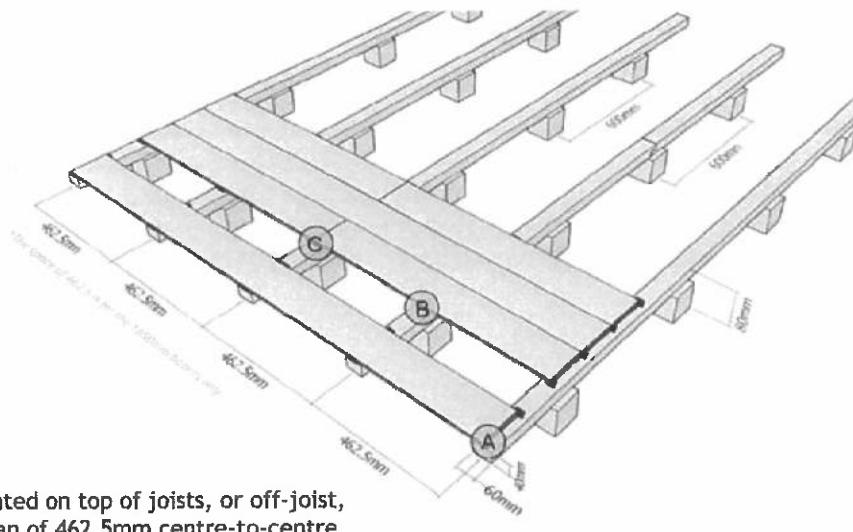

Installation 1: Clip Method

1. Use fasteners in this sequence:
 - i. Press fastener into the groove of one decking board
 - ii. Screw the fastener onto the sub beam
 - iii. Use 20 fasteners per m², relative to the width of the board 137mm wide
2. When the tongue and groove are connected on the sub beam, use 2 fasteners, 1 for every board

Note: Use only the included stainless steel decking screws (4.2 x 30mm)

A 3 to 5mm gap is recommended between each row of decking boards to allow for air circulation, and for expansion or contraction of boards. This can be achieved through either use of the clips installation method, or with spacers.

Finishing

SIMDECK Bamboo are pre-coated with a priming coat of WOCA® penetrating oil. To maintain the original finished look, one to two coats of a UV-resistant decking oil, such as WOCA® Exterior Wood Oil or Intergrain® Ultradeck, should be applied to clean and dry decking per the manufacturer's recommendation.

A quality timber sealer should be applied after installation to prevent checking and splitting at the end of cut boards. WOCA® Exterior Wood Oil should be reapplied to freshly exposed end grain and penetrations as part of the installation process.

Maintenance

SIMDECK Bamboo, if left to weather, will lighten in colour after a period of time. To maintain the original finish look, a UV-resistant decking oil, such as WOCA® Exterior Wood Oil or Intergrain® Ultradeck, should be applied at least once a year.

Cleaning

Once every 6 months, cleaning your bamboo decking with warm water, mild dish soap and a non-metallic stiff bristle brush will remove most moulds, pollens, tannins, mildew and dirt.

For a stronger wash, cleaners containing Sodium Percarbonate or Potassium Hydrioxide are recommended and safe to use on SIMDECK Bamboo boards.

High-pressure washer should be fitted with a fan nozzle attachment with a wide spray pattern (more than 35°) to prevent damaging the boards.

*For more detailed installation and warranty guidelines, please refer to the separate Installation Guide